

350-023

Cisco

CCIE® Written: WAN Switching

OfficialCerts.com is a reputable IT certification examination guide, study guides and audio exam provider. We ensure that you pass your 350-023 exam in first attempt and also get high scores to acquire Cisco certification.

If you use OfficialCerts 350-023 Certification questions and answers, you will experience actual 350-023 exam questions/answers. We know exactly what is needed and have all the exam preparation material required to pass the exam. Our Cisco exam prep covers over 95% of the questions and answers that may be appeared in your 350-023 exam. Every point from pass4sure 350-023 PDF, 350-023 review will help you take Cisco 350-023 exam much easier and become Cisco certified.

Here's what you can expect from the OfficialCerts Cisco 350-023 course:

- * Up-to-Date Cisco 350-023 questions as experienced in the real exam.*
- * 100% correct Cisco 350-023 answers you simply can't find in other 350-023 courses.*
- * All of our tests are easy to download. Your file will be saved as a 350-023 PDF.*
- * Cisco 350-023 brain dump free content featuring the real 350-023 test questions.*

Cisco 350-023 certification exam is of core importance both in your Professional life and Cisco certification path. With Cisco certification you can get a good job easily in the market and get on your path for success. Professionals who passed Cisco 350-023 exam training are an absolute favorite in the industry. You will pass Cisco 350-023 certification test and career opportunities will be open for you.

<http://www.studentidisinistra.org/?testid=exams.asp?examcode=350-023>



QUESTION: 1

What is the primary benefit of the "time. to-live" field in the IP header?

- A. To improve buffer utilization
- B. To reduce the impact of routing loops
- C. To allow calculation of round. trip delays
- D. To remind us that all earthly joys are fleeting
- E. To avoid delivery of packets that are no longer useful

Answer: B

QUESTION: 2

A router interface address is 180.60.45.96 with a mask of 255.255.255.224. What configuration statement

- A. routerospf 1 network 180.60.45.96 255.255.255.32 area 0
- B. routerospf 1 network 180.60.45.96 0.255.255.224 area 0
- C. router ospf 1 network 180.60.45.96 0.0.0.31 area 0
- D. routerospf 1 network 180.60.45.96 0.0.0.224 area 0

Answer: C

QUESTION: 3

An IGX-8 identifies itself as an IGX-32 on the configuration screen. What has gone wrong?

- A. The NPM was originally in an IGX-32.
- B. Database corruption has occurred.
- C. The user must physically set a jumper on the SCM to correct this.
- D. Use these tnovram command to change the switch type.

Answer: C

QUESTION: 4

In PNNI networks, AESA has the following general format:

- A. 12-byte network prefix plus a 7-byte End System Identifier plus 1 byte Selector
- B. 11-byte network prefix plus an 8-byte End System Identifier plus 1 byte Selector

- C. 7-byte network prefix plus a 12-byte End System Identifier plus 1 byte Selector.
- D. 13-byte network prefix, a 6-byte End System Identifier plus 1 byte Selector

Answer: D

QUESTION: 5

To eliminate the need for adjacent routers on broadcast networks to form $n(n-1)/2$ adjacencies, IS-IS defines a pseudonode or Designated Intermediate System, DIS. All router on the broadcast medium form an adjacency with the DIS. The Backup DIS is called:

- A. Redundant DIS
- B. BDR
- C. There is no concept of a backup DIS in IS-IS
- D. Designated Redundant System

Answer: C

QUESTION: 6


Cisco/StrataCom (Gang of four) LMI uses what DLCI for messages?

- A. 0
- B. 1023
- C. It should be configurable, as per the specification.
- D. It is negotiated when the ports become active.

Answer: B

QUESTION: 7

Click the Exhibit button to view the topology. Using the above diagram, which are valid BGP AS_Path Attributes received at Net1 for a route originating from AS65100? (multiple answer)

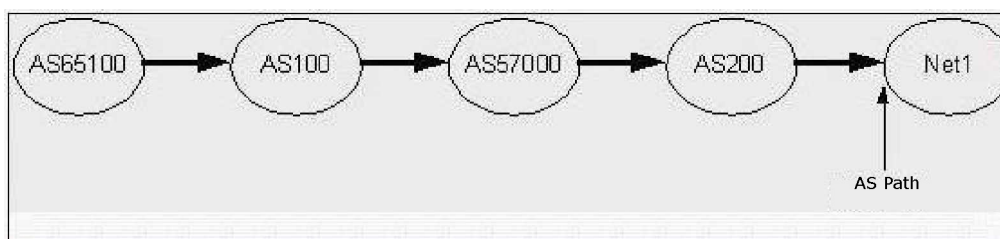

- A. 200 57000 100 65100
- B. 200 57000 100100
- C. 100 57000 200
- D. 200 57000 100
- E. 65100 100 57000 200

Answer: A,D,E

QUESTION: 8

The default network clocking source in a BPX network is:

- A. The internal oscillator of the lowest-numbered node
- B. The internal oscillator of the highest-numbered node
- C. Each node's own internal oscillator
- D. The clock chip on the network management system

Answer: B

QUESTION: 9

When using IS-IS for IP routing, Dual IS-IS defined by RFC 1195, what is true?
(multiple answer)

- A. It is necessary to configure a NSAP address.
- B. it is not possible to perform both IP and CLNS routing with the same process.
- C. IP address and subnet information is carried in the TLV field on the L-1/L-1 LSPs.
- D. Dual IS-IS does not support VLSM information.

Answer: A,C

QUESTION: 10

What is true about the DLCI field in the Frame Relay header?

- A. It consists of two portions, source and destination, which map data to a logical channel.
- B. It generally has significance only between the local switch and the DTE device.
- C. It is an optional field in the ITU-T specification.
- D. It is present only in data frames sent through the network.

Answer: B

QUESTION: 11

On each LAN segment with multiple bridges running spanning tree, the bridge closest to the:

- A. Designated bridge is selected as root bridge
- B. Root bridge is selected as designated bridge
- C. Root bridge is not selected as designated bridge
- D. Designated bridge is not selected as root bridge

Answer: B

QUESTION: 12

What best describes ADPCM?

- A. It stands for Advanced Duplicate Packet Code Marking.
- B. It specifies no transmission of data during silent periods of voice conversation.
- C. It allows synchronous data to be carried over voice card technology.
- D. It compresses voice from 64K per channel to 32K, 24K, or 16K per channel.
- E. It compresses voice from 64k to approximately 8k.

Answer: D

QUESTION: 13

What ATM cell header contains a generic flow control (GFC) field?

- A. The NNI ATM cell
- B. The UNI ATM cell
- C. Both UNI and NNI
- D. None of the above

Answer: B

QUESTION: 14

What is Fast EtherChannel?

- A. A feature to bundle multiple Ethernet point-to-point links quickly into one logical high speed link
- B. A feature to bundle multiple Fast-Ethernet point-to-point links into one logical high speed link
- C. Another name for full-duplex Fast Ethernet
- D. Another name for Gigabit Ethernet
- E. None of the above

Answer: B

QUESTION: 15

While entering commands on a console, the break key is pressed accidentally and the router reboots. What action could disable this problem?

- A. In configuration mode, enter disable break .
- B. In configuration mode, enter no service break .
- C. Change the configuration register.
- D. Replace the router- this is an invalid response to pressing the break key when past 60 seconds after boot.

Answer: C

QUESTION: 16

A Peer group leader is chosen by:

- A. Dynamic process within a peer group
- B. All nodes in the peer group
- C. The highest node ID as a tiebreaker
- D. The lowest node ID as a tiebreaker
- E. Selecting the node that is physically connected to a different peer group

Answer: A,B,C

QUESTION: 17

A router is receiving updates for a subnet from different routing protocols. The administrator wishes to take advantage of a path via a route with a less favorable

OfficialCerts.com Certification Exam Full Version Features;

- Verified answers researched by industry experts.
- Exams **updated** on regular basis.
- Questions, Answers are downloadable in **PDF** format.
- **No authorization** code required to open exam.
- **Portable** anywhere.
- 100% success **Guarantee**.
- **Fast**, helpful support 24x7.

View list of All exams we offer;

<http://www.officialcerts.com/allexams.asp>

To contact our Support;

<http://www.officialcerts.com/support.asp>

View FAQs

<http://www.officialcerts.com/faq.asp>

Download All Exams Samples

<http://www.officialcerts.com/samples.asp>

To purchase Full Version and updated exam;

<http://www.officialcerts.com/allexams.asp>



Shop now using **PayPal**



3COM	CompTIA	Filemaker	IBM	LPI	OMG	Sun
ADOBE	ComputerAssociates	Fortinet	IISFA	McAfee	Oracle	Sybase
APC	CWNP	Foundry	Intel	McData	PMI	Symantec
Apple	DELL	Fujitsu	ISACA	Microsoft	Polycom	TeraData
BEA	ECCouncil	GuidanceSoftware	ISC2	Mile2	RedHat	TIA
BICSI	EMC	HDI	ISEB	NetworkAppliance	Sair	Tibco
CheckPoint	Enterasys	Hitachi	ISM	Network-General	SASInstitute	TruSecure
Cisco	ExamExpress	HP	Juniper	Nokia	SCP	Veritas
Citrix	Exin	Huawei	Legato	Nortel	See-Beyond	Vmware
CIW	ExtremeNetworks	Hyperion	Lotus	Novell	Google	

You have made the
Right Choice

You are becoming member of most comprehensive, accurate, highest quality and lowest cost certification resource in the world.

